



# Acrobat


01-2285

# Acrobat



01-2285



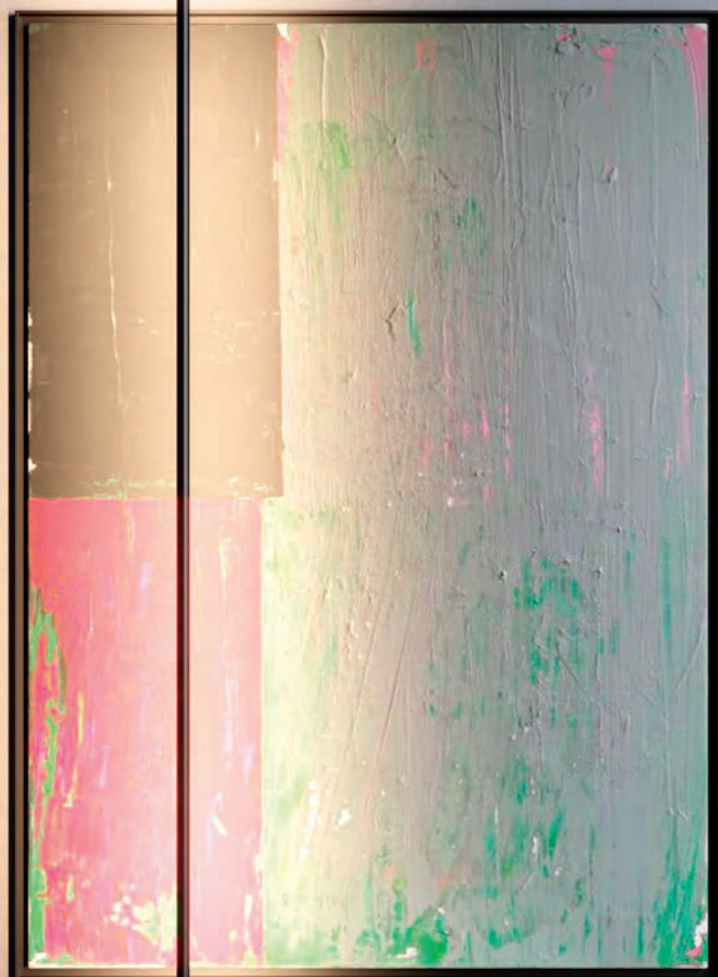

01-2284



# Acrobat

Series of lamps for interior equipped with SMD LEDs, structure of aluminum and metal painted in matt black, diffuser of opal acrylic.

Serie de corpuri de iluminat echipate cu led-uri SMD, structură din aluminiu și metal vopsită negru mat, dispersor din acril opal.

Serie di apparecchi per interni, equipaggiati con LED SMD, struttura in alluminio e metallo verniciati in nero opaco, diffusore in acrilico opalino.

Серия светильников для интерьера оснащенных светодиодами SMD, структура из алюминия и металла окрашенного в черный матовый цвет, рассеиватель из опалового акрила.

Beltéri lámpa testek, SMD LED-el szerelve, matt fekete alumínium és fém szerkezet, akril opál diszperzór.

Серия интерьерни тела с SMD LED платка, метални части от алуминий и стомано в черен мат, акрилен дифузер в цвят опал.



Séria interiérových svetidiel, vybavených LED diódami SMD, hliníková konštrukcia a kov lakovaný v matnej čiernej farbe, opálový akrylový difúzor.



art. **01-2285**



|                   |                              |
|-------------------|------------------------------|
| Led type          | SMD LED 2835 280 pcs x 0,12W |
| Power             | 31W                          |
| Input             | 220V-240V, 50/60Hz           |
| Color temperature | 3000K                        |
| Lumen source      | 3841 lm                      |
| Lumen system      | 1710 lm                      |
| CRI               | 90                           |
| Dimmable TRIAC    | ☑                            |
| CE  IP20          |                              |

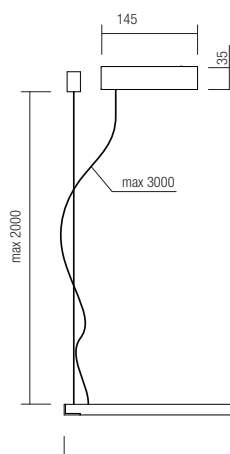



01-2284



art. **01-2284**

|                   |                              |
|-------------------|------------------------------|
| Led type          | SMD LED 2835 264 pcs x 0,13W |
| Power             | 30W                          |
| Input             | 100V-240V, 50/60Hz           |
| Color temperature | 3000K                        |
| Lumen source      | 2890 lm                      |
| Lumen system      | 1680 lm                      |
| CRI               | 90                           |
| Dimmable          |                              |
| <b>CE IP20</b>    |                              |

#### Infrared induction switch

1. Short approach ON/OFF
2. Long approach adjust brightness

